



The new HEINE flexible Endoscopes are exceptionally-bright with the advantage of a small radius of curvature. They are ideal for a whole range of applications as they are waterproof and oil- and petrol resistant.

HEINE SF6-1000® Semi-flexible 6 mm Endoscope

F.O.-Endoscope



LI-ION

- ∴ Working length: 1000 mm.
- ∴ Diameter: 6mm.
- ∴ Radius of curvature: 30 mm.
- ∴ Direction of view: 0°.
- ∴ Opening Angle: 50°
- ∴ Brightness: up to 120 000 lx at a distance of 16 mm.
- ∴ Working distance: 10 mm to infinity.
- ∴ Attachable Angled Side-View Adapters (Distal) 90° and 110° (Optional Accessory).
- ∴ Waterproof, oil and petrol-resistant probe.

∴ Light and power sources:

- 3.5V-version:** BETA Battery handle with 3 LR14 dry batteries or rechargeable handles NiMH or Li-ion. AV-adaptor with 3.5V XHL bulb or LED ScopeLight.
- 12V-version:** Connecting cable for cigarette lighter socket (5m) or Accubox I with brightness control (AV-Adaptor necessary).
- 220V-version:** F.O. projector HK 7000 and light guide.

For more information on HEINE power sources please see pages 30-33.



SF6-1000 in transport/storage case (without light and power source)	T-00.26.721
---	--------------------

SF6-1000 Endoscope Sets	3.5 V	12 V
-------------------------	-------	------

Set SF 6-1000, 3.5V, contents: SF 6-1000, AV-Adaptor, BETA Battery handle 3.5V, XHL Xenon Halogen spare bulb 3.5V, Rubber Cap, transport and storage case	T-538.20.123	
--	---------------------	--

Set SF 6-1000, 12V, contents: SF 6-1000, AV-Adaptor, Connection Cable for Cigarette Lighter Socket, XHL Xenon Halogen spare bulb 12V, Rubber Cap, and Protective carrying case		T-538.50.246
---	--	---------------------


Endoscope-Set SF6 with LED ScopeLight

Set SF6-1000, LED ScopeLight, BETA Battery handle 3.5V, extension cord automatic, plug, rubber eyepiece, transport and storage case	T-551.28.123	
---	---------------------	--

NEW !



Flexible Endoscope Brightness at a distance of 16 mm

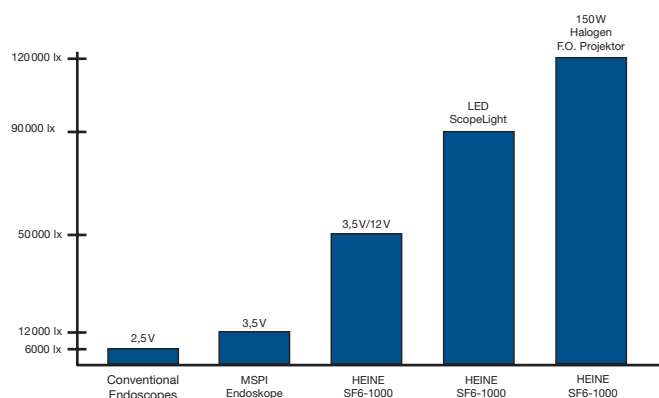

HEINE SFM8-1000®/2000® Flex & Stay 8 mm Endoscope
F.O.-Endoscope



LI ION



- ✦ **Working length:** 1000mm or 2000mm.
- ✦ **Diameter:** 8 mm.
- ✦ **Outer tube:** Malleable.
- ✦ **Radius of curvature:** 60mm.
- ✦ **Direction of view:** 0°.
- ✦ **Brightness:** up to 90000 lx at a distance of 16 mm.
- ✦ **Working distance:** 10 mm to infinity.
- ✦ **Attachable Angled Side-View Adaptors** (Distal) 90° and 110° (Optional Accessory).
- ✦ **Waterproof, oil and petrol-resistant probe.**

✦ **Light and power sources:**

3.5V-version: BETA Battery handle with 3 LR14 dry batteries or rechargeable handles NiMH or Li-ion. AV-adaptor with 3.5V XHL bulb or LED ScopeLight.

12V-version: Connecting cable for cigarette lighter socket (5m) or Accubox I with brightness control (AV-Adaptor necessary).

220V-version: F.O. projector HK 7000 and light guide.

For more information on HEINE power sources please see pages 30-33.

SFM 8-1000 Endoscope in transport and storage case without light and power source	T-00.26.731
SFM 8-2000 Endoscope in transport and storage case without light and power source	T-00.26.733

SFM8-1000/2000 Endoscopes Sets	3.5 V	12 V
--------------------------------	-------	------

Set SFM8-1000, 3.5V, contents: SFM 8-1000, AV Connector, BETA Battery handle 3.5V, XHL Xenon Halogen spare bulb 3.5V, Rubber Cap, transport and storage case	T-539.20.123	
---	---------------------	--

same, but with SFM8-2000	T-540.20.123	
--------------------------	---------------------	--

Set SFM8-1000, 12V, contents: SFM 8-1000, AV Connector, Connecting cable cinch/AV connector, Accubox I, Rubber Cap, XHL Xenon Halogen spare bulb 12V, transport and storage case	T-539.50.629	
---	---------------------	--

same, but with SFM8-2000	T-540.50.629	
--------------------------	---------------------	--

Endoscope-Sets SF6/SFM8 with LED ScopeLight	3.5 V	
---	-------	--

Set SFM8-1000, LED ScopeLight, BETA Battery handle 3.5V, extension cord automatic plug, rubber eyepiece, transport and storage case	T-552.28.123	
---	---------------------	--

same, but with SFM8-2000	T-553.28.123	
--------------------------	---------------------	--





Accessories for Flexible Endoscopes SF/SFM



Adaptor T-00.26.407



Adaptor T-00.26.408



AV-Adaptor with bulb



110° Angled Side View Adaptor



90° Angled Side View Adaptor



Camera-Adaptor



Rubber Cap

▶ **NEW !**



LED ScopLight



CCD-Camera-Adaptor

▶ **NEW !**



Adaptor for Wolf light guides	T-00.26.407
Adaptor for Storz, Olympus, Winter & Ibe light guides	T-00.26.408
AV-Adaptor incl. 12 V XHL Xenon Halogen bulb	T-05.26.402
AV-Adaptor incl. 3.5 V XHL Xenon Halogen bulb	T-02.26.402
110° Angled Side-View Adaptor for SF/SFM Endoscopes	T-00.26.723
90° Angled Side-View Adaptor for SF/SFM Endoscopes	T-00.26.724
Rubber Cap for Spectacle Wearers	T-00.26.175
Camera Adaptor 49 mm	T-00.26.176
Camera Adaptor 52 mm	T-00.26.177
Camera Adaptor 55 mm	T-00.26.178
Adaptor Nikon Coolpix/Endoscope	T-00.26.186
CCD Camera Adaptor F=35mm	T-00.26.190
Extension cord automatic plug	T-00.99.230
BETA Belt Clip for BETA handles	T-00.99.008
Transport and storage case SF/SFM	T-539.00.000
XHL Xenon Halogen spare bulb 12 V	T-05.88.103
XHL Xenon Halogen spare bulb 3.5 V	T-02.88.078
LED ScopLight Endoscope illumination 3.5V	T-08.26.075

A-Cam camera with processor (available systems: PAL or NTSC, please specify when ordering) **T-00.31.201**

A-Cam Video Camera

The A-Cam video camera features a 1/2" CCD-Chip and, in conjunction with the C-Mount CCD camera adaptor, provides high-quality video images from HEINE rigid and flexible endoscopes. The A-Cam processor is included with the camera. Both S-VHS and composite signals are provided for input to the monitor.